


PROCESS

# Zone II High flow Vaporiser

MAKING INTERVENTION  
**SMARTER**

## Zone II high flow vaporiser

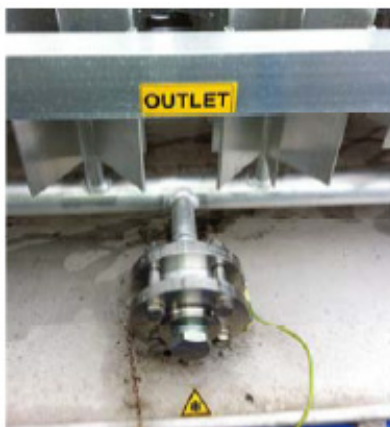

## APPLICATIONS

- Maximum Flow Rate: 850Nm<sup>3</sup>/hr.
- Maximum Working Pressure: 40 Barg.
- Inlet Connections 1: 3/4"CGA
- Discharge 1: 1/2" NPTF

## FEATURES

- To provide nitrogen gas for purging operations in an oilfield environment.
- Built to meet all current EC safety legislation.
- All possible dropped objects wired or chained to skid.
- Skid fully earthed with cable tie points available.
- Drip tray to cover full skid base.

## BENEFITS

- Design Code AD2000
- Certified to PED 97/23/EC
- Certified to BS EN12079
- ATEX approved

### Weight Data

**Gross Weight** 1,900kg

### Dimensions

**Length** 2,960mm

**Width** 2,410mm

**Height** 2,700mm